


AMF-10R

AMF Controller Interface Module

With Pluggable Terminal Block to AMF Controller*1 & BTS*2

Features

- For use in Electrical Operation and Mechanical Maintenance Transfer Switch connecting to Assorted Brand AMF Controller Available on the Market
- Simplify All Wiring with Pluggable Terminal Block
- Easy Assembly & Maintenance with No Chance of Wiring Mistakes
- Circuits are Finger Safe with UL94-V0 Epoxy Protection
- Built-In 3 Phase Fuses to Protect Mains & Generator Circuits
- Build-In Adjustable Transfer Delay Time for Mains and Generator (10~15 Seconds)

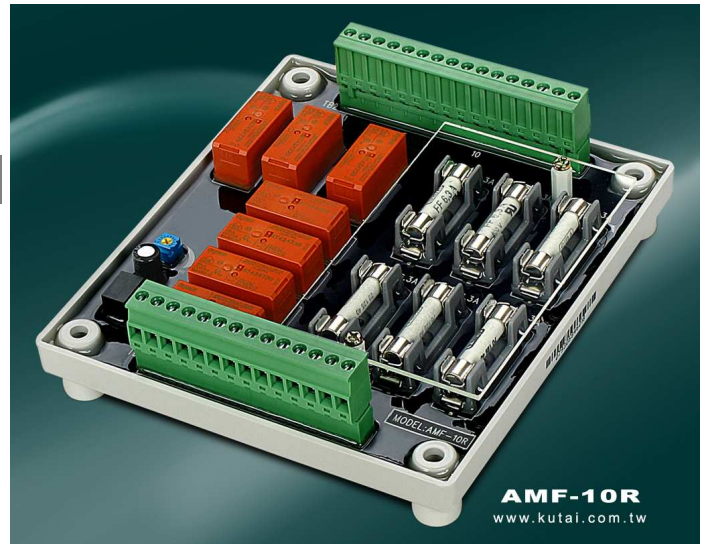


Specifications

Item	Function	Current	Fuse Capacity
F1	Protect Normal Power Circuit	6.3A	50 KA @ 500 VAC
F2	Protect Normal Power Circuit	6.3A	50 KA @ 500 VAC
F3	Protect Normal Power Circuit	6.3A	50 KA @ 500 VAC
F4	Protect Emergency Power Circuit	6.3A	50 KA @ 500 VAC
F5	Protect Emergency Power Circuit	6.3A	50 KA @ 500 VAC
F6	Protect Emergency Power Circuit	6.3A	50 KA @ 500 VAC

Item	Function	Capacity
TB1	Connect to Transfer Switch	300 VAC / 15A
TB2	Connect to AMF Controller	300 VAC / 15A
Mains "ON"	Transfer from Generator to Mains	250 VAC / 7A
Generator "ON"	Transfer from Mains to Generator	250 VAC / 7A

Mechanical Specifications (Unit : mm)

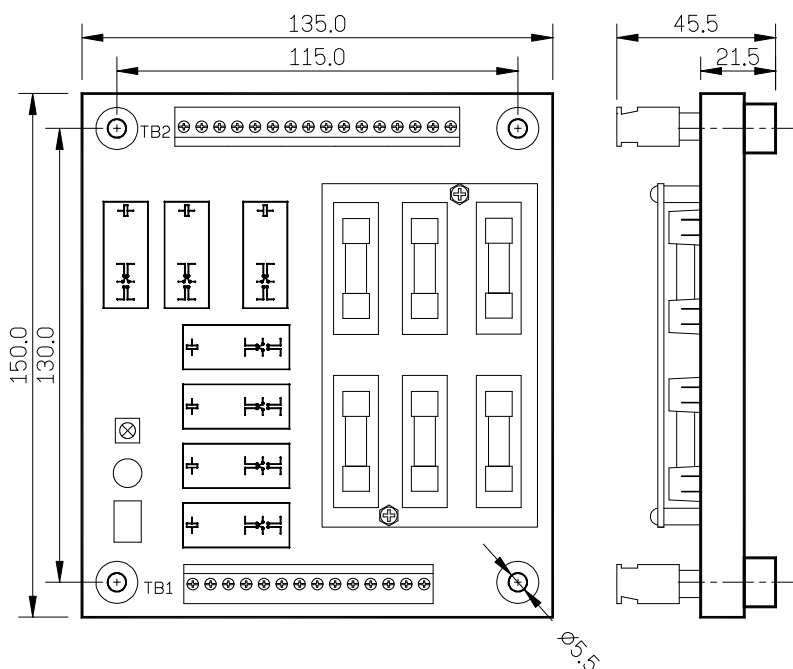

Physical Specification

Dimensions 150.0 (L) x 135.0 (W) x 45.5 (H) mm
Weight 260 g ±2%

*1 AMF : Automatic Mains Failure Controller
 *2 BTS : Basic Transfer Switch